


## CDO-300

### Flangemount Operator

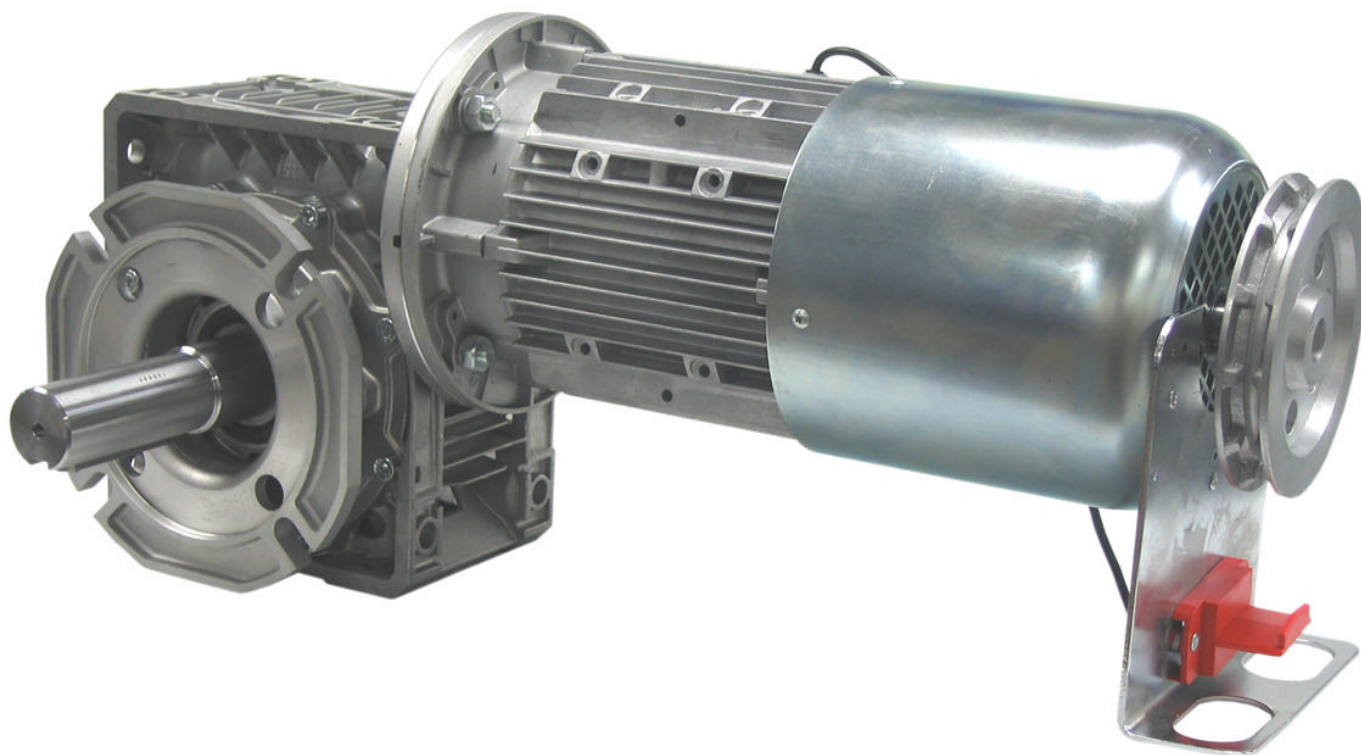

### Special Features

- Safety Interlock Switch for Manual Operation
- Integral Thermal Protection
- 40mm Dia. industry standard output shaft
- I.P. 54 Environment Protection
- Gear Driven Limit Switches
- Phosphor Bronze Worm Wheel
- High starting Torque—Industrial Duty Motor

Please Contact Our Sales Department On 01928 579050 For Further Information

## PRODUCT DESCRIPTION

The CDO-300 Rolling Door Operator is available with a 2.2kw, 400v Three Phase Brake Motor. This model can be fitted with a Hand Crank or High Level Hand Chain System which enables the roller shutter door to be manually opened & closed when required.

## TECHNICAL INFORMATION & ORDER CODES

Data \ Type	CDO-300 c/w Hand Crank	CDO-300 c/w High Level Hand Chain
Power (kW)	2.2	
Output Speed (R.P.M.)	24/45	
Torque (Nm)	518/370	
Environmental Protection	I.P.54	
Current (Amps)	6.4	
Power Supply	400v/3ph/50Hz	

### OPERATOR DIMENSIONS:- CDO-300 c/w High Level Hand Chain

